


## 50" FlatTV Monitor

**MATCH**  **LINE** **FLATTV**™

- Flat, Slim and Wide design
- Plasma HD technology
- Superslim 4.3" depth
- 160° viewing angle / Anti-reflective coating
- HD in - 2fhYPbPr in / RGB+HV
- DVI-digital in / 1fh YUV in
- VGA in
- Wall mount kit included
- Optional stand

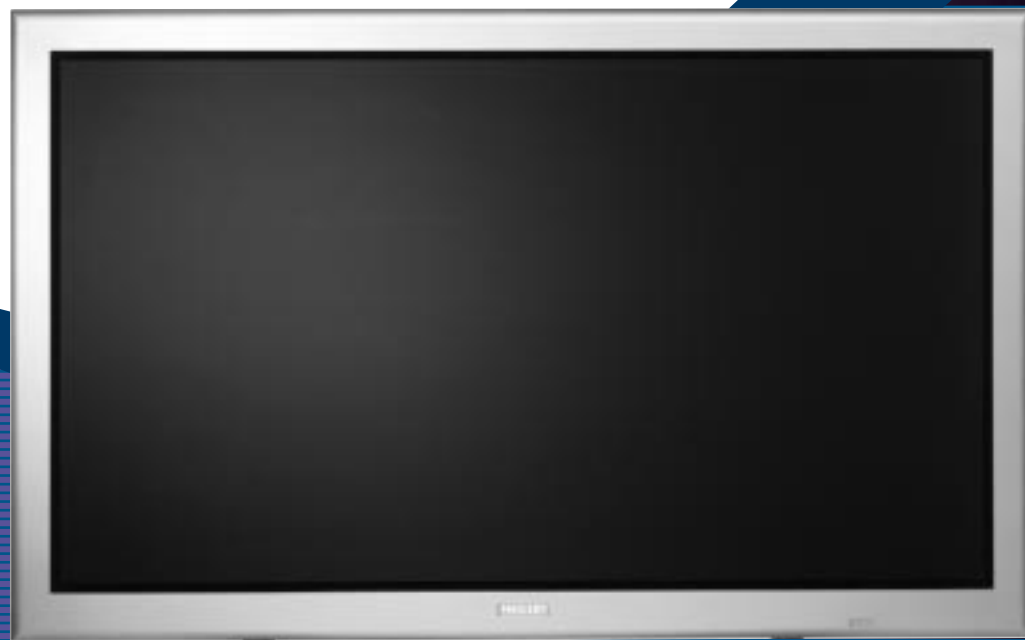

*Let's make things better.*



**PHILIPS**

## 50" FlatTV Monitor



### Product highlights

**HD Plasma technology** with 1365x768 pixels.

**Dual HD component input and full 1080i** resolution display for connection to high definition input.

**480i, 576i, 1080i, 480p, 720p** resolution support.

**YPbPr inputs** for best DVD reproduction

**Seven menu languages**, US-English (with icons), UK-English, German, French, Spanish, Italian, Portuguese

### Technical specifications

#### Plasma screen

- Visible screen diameter 50" - 16:9 aspect ratio
- HD 1365x768 pixels (x3)
- Contrast ratio : 400:1 (dark room)
- Brightness : 600cd/m<sup>2</sup> (without filter plate)
- Anti-reflex coated glass screen
- Wall mount kit : Flat-to-Wall
- Optional stands : a.o. 'Arch' ST50 9964/2A

#### Picture processing

- Video standards :
  - PAL 4.43 (B, G, D, H, I, N)
  - PAL 3.58 (M, N)
  - NTSC 3.58 (M)
  - NTSC 4.43
  - SECAM
- Auto Picture™ (5 modes)
  - soft, natural, rich, personal, multimedia
- Tint Control (3 modes)

#### Ease of Use

- Menu Languages : US-English (with icons), UK-English, German, French, Spanish, Italian, Portuguese
- Dynamic graphical user interface. Easy and intuitive operation through feedforward and back-tracking display.
- Full menu control of all functions through layered menus.
- Onscreen status display for channels and functions (OSD)

#### Remote Control

- RC19335009

#### Connections


- VGA
  - VGA in (15pin sub-D)
- Video
  - VIDEO 1 : Video CVBS (RCA)
  - VIDEO 2 : Video CVBS (RCA)
  - VIDEO 3 : S-Video (DIN 4-pin)
- RGB
  - RGB 1 (Mini D-sub 15pin)
  - RGB 2 : R, G, B, H, V (BNC)
  - RGB Digital : DVI-d in (29pin)
- HD / DVD / DTV
  - Y, Pb, Pc (RCA)

#### Miscellaneous

- VGA cable included, 2m
- Ambient temperature : 0/+40°C
- Maximum operating altitude : 1900m / 6230ft
- Mains : 100-240V, 50/60Hz
- Power consumption: ± 595W (monitor only) ; Stand by : <3W
- Weight
  - monitor : 101.5 lbs
  - table-top stand : 17.7 lbs
  - combination : 119 lbs
- Dimensions (WxHxD):
  - monitor : 48.9x30.2x4.3 in.
  - monitor with table-top stand : H 33.7 in.
  - carton (monitor) : 54.8x36.0x17.0 in.

UPC : 0 3784992556 0  
50FD9955

Monitor Connectors

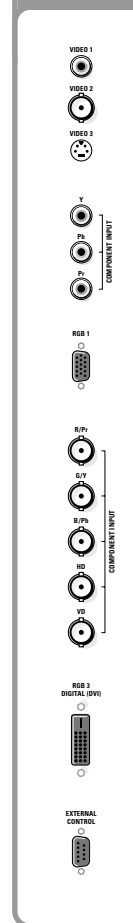

RC 19335009

